

Version FTTH-001 V1.0

Technical Specification
Fiber Optic Cable Distribution Box

FTTH-001

Contents


1. General	2
1.1 Description	2
1.2 Standards Comply	2
1.3 Applications Environment	2
2. Characteristics	3
3. Specifications	3
3.1 Mechanical specifications	3
3.2 Optical specifications	3
4. Configuration	4
4.1 Accessory section	4
4.2 Optional Accessories	4
5. Product Picture	4
6. Package	4

1. General

1.1 Description

The equipment is used as a termination point for the feeder cable to connect with drop cable in FTTH communication network system. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the FTTH network building.

Production type	Classification
FTTH-001	Fiber optic cable distribution box

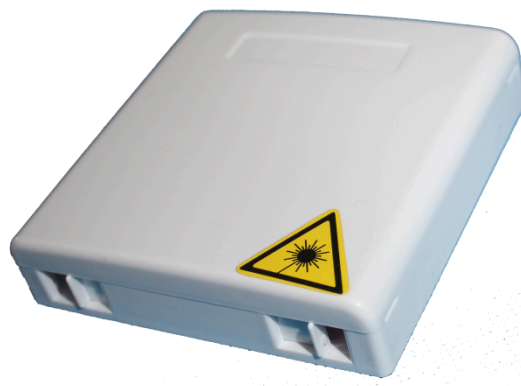

Appearance of FTTH-001

1.2 Standards Comply

The product is designed, manufactured and tested according to the standards as follows:

ITU-T L.13	Performance requirements for passive optical nodes: Sealed closures for outdoor environments
------------	--

1.3 Applications Environment

Item	Value
Operation temperature	-40 °C ~ +65 °C
Installation temperature	-15 °C ~ +40 °C
Storage temperature	-45 °C ~ +75 °C

2. Characteristics

Economic design

Ability to allow cables to enter from both sides of the unit

Removable cover for easy access

Compact, low profile, wall mounted unit used for small and large business premises

3. Specifications

3.1 Mechanical specifications


Item	Specifications	Note
Material of housing	High-strength PC+ABS	
Material of internal components	ABS	
Material of metal accessory	High-quality stainless steel	
External dimension(mm)	86*86*19	
Color	Gray, black, white	
Number of distribution cable ports	2	
Number of drop cable ports	2	
2 Main Cable Ports	2 cable ports, each port for 1 cable with max \varnothing 5mm.	
Capacity(Max)	2 Splices	
simplex adaptors	2	

3.2 Optical specifications


Item	Test Method	Specification	Note
Insertion loss(dB)	IEC61300-3-4-Method B	Mean \leq 0.1dB · Maximum \leq 0.3dB	
Return loss(dB)	IEC61300-3-6-Method 1	APC \geq 60dB · UPC \geq 50dB	
Random connection	IEC61300-3-4	Mean \leq 0.15dB · Maximum \leq 0.3dB	
Splitter		Refer to insert type splitter technical specification	
Repeatability	IEC 61300-2-2 500 cycles	During the test the difference between the initial measurement and each of the measurements after one cycle must be less than 0.20 dB, and should be cleaned otherwise, with a limit of 25 cleanings	

4. Configuration


4.1 Accessory section

No.	Name	Reference picture	Quantity	Remark
1	Heat-shrinkable protection sleeve		1 bag	L=45mm

4.2 Optional Accessories

No.	Name	Model	Reference picture	Quantity	Remark
1	Wall-mounting kit			1 set	

5.Product Picture



FTTH-001 product picture

6. Package

Standard

Double corrugated carton, 575*350*220 mm, 200 in carton, about 12Kg.