

Technical Specification Fiber Optic Splice Closure

HTSC-132

Customer Approval			
	Name	Signature	Date
Approved by			

Contents


1. General	2
1.1 Description	2
1.2 Standards Comply	2
1.3 Applications Environment	2
2. Characteristics	3
3. Specifications	3
4. Product Picture	4
5. Configuration	4
5.1 Optical splice trays	4
5.2 Standard Accessories	5
5.3 Optional Accessories	6
6. Package	6

1. General

1.1 Description

Fiber optic splice closure is mainly applicable to the straight-through and branching of aerial cables, buried cables and duct cables, as well as the protection on cable joints.

Production type	Classification
HTSC-132	Fiber optic splice closure

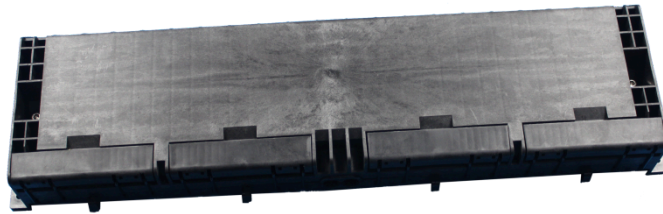

Appearance of HTSC-132

1.2 Standards Comply

The product is designed, manufactured and tested according to the standards as follows:

ITU-T L.13	Performance requirements for passive optical nodes: Sealed closures for outdoor environments
------------	--

1.3 Applications Environment

Item	Value
Operation temperature	-40 °C ~ +65 °C
Installation temperature	-15 °C ~ +40 °C
Storage temperature	-45 °C ~ +75 °C


2. Characteristics

Installation and reentry with a minimum of tools
 Easy to be opened or closed
 Re-enterable and reusable
 All hardware are captived
 Capable for loading 1:8 PLC splitter
 Capable for max. 8pcs SC adaptors

3. Specifications

Item	Specifications	Note
Material of housing	High-strength PP+GF	
Material of internal components	High-strength ABS	
Material of metal accessory	High-quality stainless steel	
External dimension(mm)	643mm x 175mm x 76mm	
Color	Black	
Number of ports	8	
Cable ports/Max.diameter of cable(mm)	8 main cable ports: 4 large ports for 1 cable with max 16 mm, 4 large ports for 1 cable with max 8 mm 8 drop cable ports: for diameter 3mm or 3x2 drop cables	
Sealing type	Mechanical	
IP grade	IP67	
Splicing capacity(Max)	48	Optional as request


4 .Product Picture

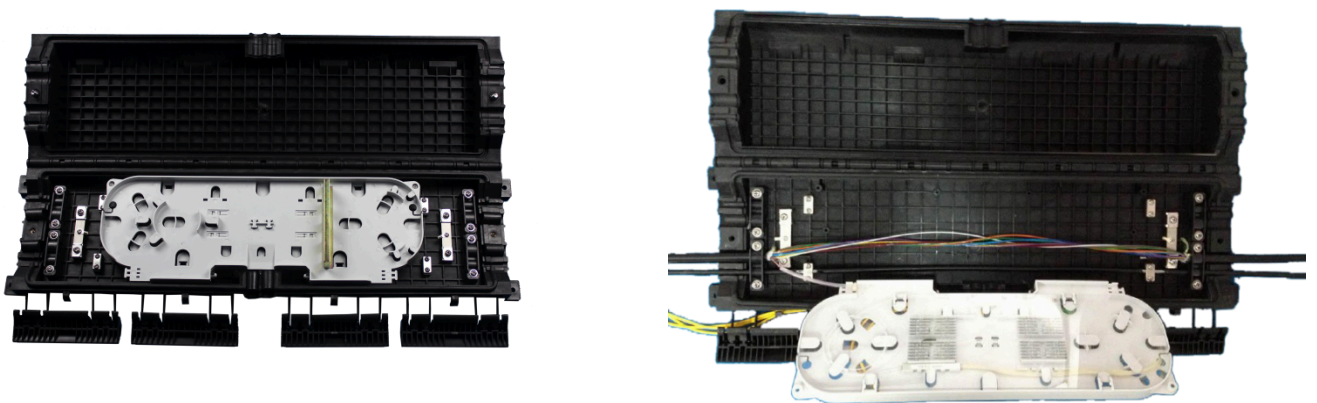


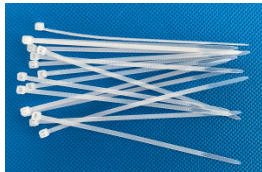



HTSC-132 product picture

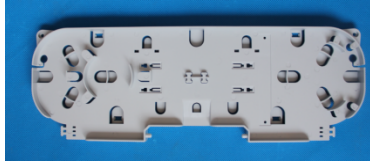

5. Configuration

5.1 Optical splice trays




No	Model	Pic	Capacity	Note
1	T069A		48F(2 layer)	

5.2 Standard Accessories

No.	Name	Reference picture	Quantity	Remark
1	Heat-shrinkable protection sleeve		1 bag	L=45mm
2	Nylon cable tie		16 pcs	L=120mm
3	Sealing tape		1 rolls	Black
4	Installation tape		1 roll	black
5	Buffer tube for bunchy fiber		n pcs	Each piece: OD=4.5mm, L=50cm QTY: n=trays number

6	Special wrench		1set	
7	Installation manual		1pc	English

5.3 Optional Accessories

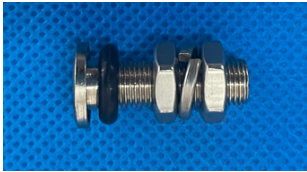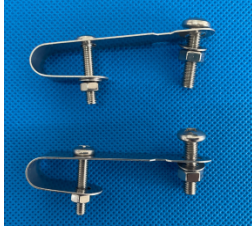No.	Name	Model	Reference picture	Quantity	Remark
1	Earthing deriving device			1pc	
2	Aerial-mounting kit	JK02		1 set	
3	Wall-mounting kit			1 set	

6. Package

Standard

Double corrugated carton, 67.5*50*48.5 CM, 6 in carton, about 17.6Kg