

Technical Specification
Fiber Optic Splice Closure
HTSC-220

| Customer Approval | | | |
|--------------------------|-------------|------------------|-------------|
| | Name | Signature | Date |
| Approved by | | | |

Contents

| | |
|------------------------------|---|
| 1. General | 2 |
| 1.1 Description | 2 |
| 1.2 Standards Comply | 2 |
| 1.3 Applications Environment | 2 |
| 2. Characteristics | 3 |
| 3. Specifications | 3 |
| 4. Product Picture | 4 |
| 5. Configuration | 4 |
| 5.1 Optical splice trays | 4 |
| 5.2 Standard Accessories | 5 |
| 5.3 Optional Accessories | 6 |
| 6. Package | 9 |

1. General

1.1 Description

Fiber optic splice closure is mainly applicable to the straight-through and branching of aerial cables, buried cables and duct cables, as well as the protection on cables joints.

| Production type | Classification |
|-----------------|--|
| HTSC-220 | Fiber optic splice closure (dome type) |



Appearance of HTSC-220

1.2 Standards Comply

| | |
|----------|--|
| ITU L.13 | Performance requirements for passive optical nodes: Sealed closures for outdoor environments |
|----------|--|

1.3 Applications Environment

| Item | Value |
|--------------------------|-----------------|
| Operation temperature | -40 °C ~ +65 °C |
| Installation temperature | -15 °C ~ +40 °C |
| Storage temperature | -45 °C ~ +75 °C |

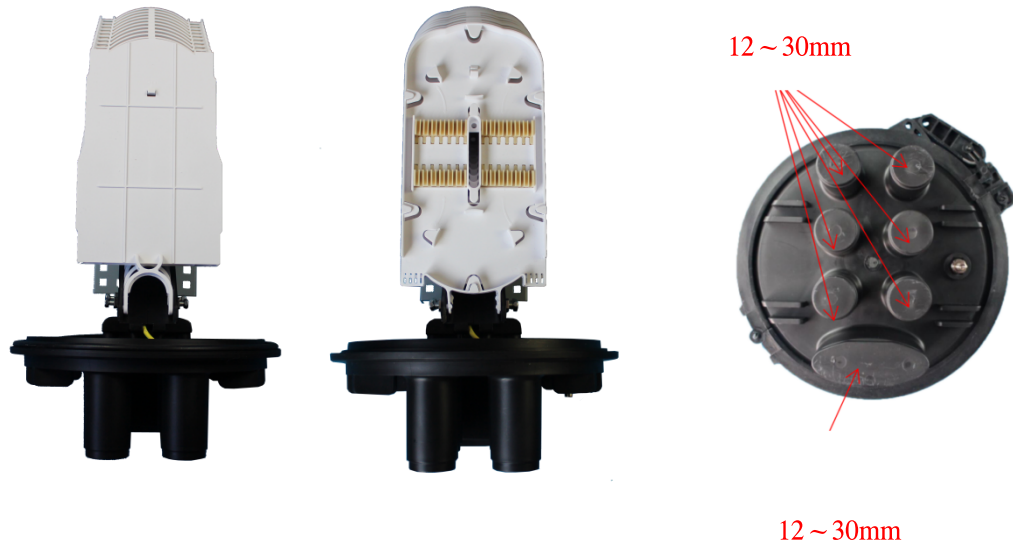
2. Characteristics

1. Dome mechanical sealing with advanced internal structure design.
2. High performance plastic, suitable for outdoor use, good weather resistant and UV resistance.
3. Efficiently structure installation design save time when assembling.
4. Easy for re-enter, easy for maintaining.
5. With oval input port, pass through route with branch is compatible.
6. IP rate: IP68
7. Pole-mounted, aerial-mounted, wall-mounted, hand hole-mounted are appropriate.

3. Specifications

| Item | Specifications | Note |
|--|------------------------------|---|
| Material of housing | High-strength PP+GF | |
| Material of internal components | High-strength ABS | |
| Material of metal accessory | High-quality stainless steel | |
| External dimension(mm) | Φ293*488mm | |
| Color | Black | |
| Number of ports | 1 oval port 6 round ports | |
| Fiber cable diameter of oval port (mm) | 12-30 mm | |
| Fiber cable dimension of round port (mm) | 12-30 mm | |
| Sealing type | Heat shrink sealing | |
| IP grade | IP68 | |
| Splicing capacity(Max) (T010A) | 11x24=264F(Single fiber) | Splice tray type and quantity can be optional as customer's request |
| Splicing capacity(Max) (T011A) | 12*24=288F(Single fiber) | Splice tray type and quantity can be optional as customer's request |
| Splicing capacity(Max) (T117A) | 12*48=576F(Single fiber) | Splice tray type and quantity can be optional as customer's request |
| Splicing capacity(Max) (T011E) | 12*144=1728F(12F Ribbon) | Splice tray type and quantity can be optional as customer's request |

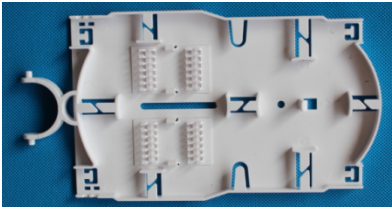
4. Product Picture


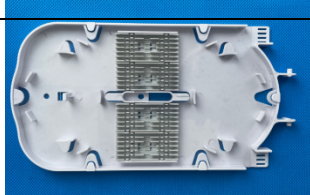



HTSC-220 product picture





5. Configuration








5.1 Optical splice trays

| No | Model | Pic | Capacity | Note |
|----|-------|---|----------|------|
| | |  | | |


| | | | | |
|--|--|--|--|--|
| | |  | | |
| | |  | | |
| | |  | | |

5.2 Standard Accessories






| No. | Name | Reference picture | Quantity | Remark |
|-----|-----------------------------------|--|----------|--|
| 1 | Heat-shrinkable protection sleeve |  or  | 1 bag | L=60mm (T010A) L=60mm (T011A) L=45mm (T117A) L=40mm (T011E) |
| 2 | Nylon cable tie |  | 16 pcs | L=120mm |
| 3 | Branch clip |  | 1 rolls | Black |

| | | | | |
|----|------------------------------|---|--------|--|
| 4 | Installation tape |  | 1 roll | black |
| 5 | Buffer tube for bunchy fiber | | n pcs | Each piece: OD=4.5mm, L=50cm QTY: n=trays number |
| 6 | Sand paper |  | 4 pc | 2.5cm*27cm |
| 7 | Aluminum foil |  | 4 pc | 10cm*25cm |
| 8 | Heat shrink tube(Oval port) |  | 1 pc | Φ75x150mm |
| 9 | Heat shrink tube(Round port) |  | 6 pc | Φ40x150mm |
| 10 | Installation manual |  | 1pc | English |
| 11 | Desiccant |  | 2 bag | 5g/bag |

5.3 Optional Accessories

| No. | Name | Model | Reference picture | Quantity | Remark |
|-----|------------------------|-------|--|----------|--------|
| 1 | Pressure testing valve | |  | 1pc | |

| | | | | | |
|---|--------------------------|---------------------|--|-------|---|
| 2 | Earthing deriving device | |  | 1pc | |
| 3 | Pole-mounting kit | BZ25 |  | 1 set | |
| 4 | Aerial-mounting kit | JK05 |  | 1 set | |
| 5 | Wall-mounting kit | GB19 |  | 1 set | |
| 6 | Elliptical hole plug | BC6-001-M2-2 2mm |  | 1 set | Maximum diameter of cable \varnothing 21~ \varnothing 22mm |
| 7 | Elliptical hole plug | BC6-001-M2-2 0mm |  | 1 set | Maximum diameter of cable \varnothing 19~ \varnothing 20mm |
| 8 | Elliptical hole plug | BC6-001-M2-1 4mm |  | 1 set | Maximum diameter of cable \varnothing 12~ \varnothing 14mm |
| 9 | Elliptical hole plug | BC6-001-M2-1 1mm |  | 1 set | Maximum diameter of cable \varnothing 9.5~ \varnothing 11mm |

| | | | | | |
|----|----------------------|-------------------|--|-------|---|
| 10 | Elliptical hole plug | BC6-001-M2-8.5mm |  | 1 set | Maximum diameter of cable $7 \sim \varnothing 9.5\text{mm}$ |
| 11 | Elliptical hole plug | BC6-001-M2-6.5mm |  | 1 set | Maximum diameter of cable $5 \sim \varnothing 7\text{mm}$ |
| 12 | Elliptical hole plug | BC6-002-M8-5mm |  | 1 set | Maximum diameter of cable $\varnothing 3 \sim \varnothing 5.2\text{mm}$ |
| 13 | Elliptical hole plug | BC6-002-M6-8mm |  | 1 set | Maximum diameter of cable $\varnothing 5 \sim \varnothing 8\text{mm}$ |
| 14 | Elliptical hole plug | BC6-002-M4-9mm |  | 1 set | Maximum diameter of cable $\varnothing 5 \sim \varnothing 9\text{mm}$ |
| 15 | Elliptical hole plug | BC6-002-M1-16mm |  | 1 set | Maximum diameter of cable $\varnothing 13 \sim \varnothing 16\text{mm}$ |
| 16 | Elliptical hole plug | BC6-002-M2-11mm |  | 1 set | Maximum diameter of cable $\varnothing 8 \sim \varnothing 11\text{mm}$ |
| 17 | Elliptical hole plug | BC6-002-M12-2.5mm |  | 1 set | Maximum diameter of cable $\varnothing 2.5\text{mm}$ |
| 18 | Elliptical hole plug | BC6-002-M12-3.2mm |  | 1 set | Maximum diameter of cable $\varnothing 3.2\text{mm}$ |

| | | | | | |
|----|----------------------|----------------------|--|-------|---|
| 19 | Elliptical hole plug | BC6-002-M8-2x 3mm |  | 1 set | Maximum diameter of cable 2x3mm |
| 20 | Elliptical hole plug | BC6-003-M8-3 mm |  | 1 set | Maximum diameter of cable \varnothing 3mm |

6. Package

Standard

Double corrugated carton, 650*330*660 mm, 2 in carton, about 12Kg