

Technical Specification Fiber Optic Splice Closure

HTSC-FD33

Customer Approval			
	Name	Signature	Date
Approved by			

Contents

1. General	2
1.1 Description	2
1.2 Standards Comply	2
1.3 Applications Environment	2
2. Characteristics	3
3. Specifications	3
4. Product Picture	4
5. Configuration	4
5.1 Optical splice trays	4
5.2 Standard Accessories	5
5.3 Optional Accessories	5
6. Package	5

1. General

1.1 Description

Fiber optic splice closure is mainly applicable to the straight-through and branching of aerial cables, buried cables and duct cables, as well as the protection on cable joints.

Production type	Classification
HTSC-FD33	Fiber optic splice closure



Appearance of HTSC-FD33

1.2 Standards Comply

The product is designed, manufactured and tested according to the standards as follows:

ITU-T L.13	Performance requirements for passive optical nodes: Sealed closures for outdoor environments
------------	--

1.3 Applications Environment

Item	Value
Operation temperature	-40 °C ~ +65 °C
Installation temperature	-15 °C ~ +40 °C
Storage temperature	-45 °C ~ +75 °C

2. Characteristics

Compact design for FTTH application.

Hinged structure

Sheath retention & central strength member fasten system included.

Ribbed closure construction-lightweight plastic offers strength and resistance to chemical and U.V attack

Installation and reentry with a minimum of tools


All hardware are included

RoHS compliance

3. Specifications

Item	Specifications	Note
Material of housing	High-strength PP+GF	
Material of internal components	High-strength ABS	
Material of metal accessory	High-quality stainless steel	
External dimension(mm)	225mm x 107mm x 48mm	
Color	Black	
Number of ports	6	
Cable ports/Max.diameter of cable(mm)	2 ports for main cable with 18mm, 4 ports for drop cable with 9mm.	
Sealing type	Mechanical	
Splicing capacity(Max)	8	Optional as request


4.Product Picture

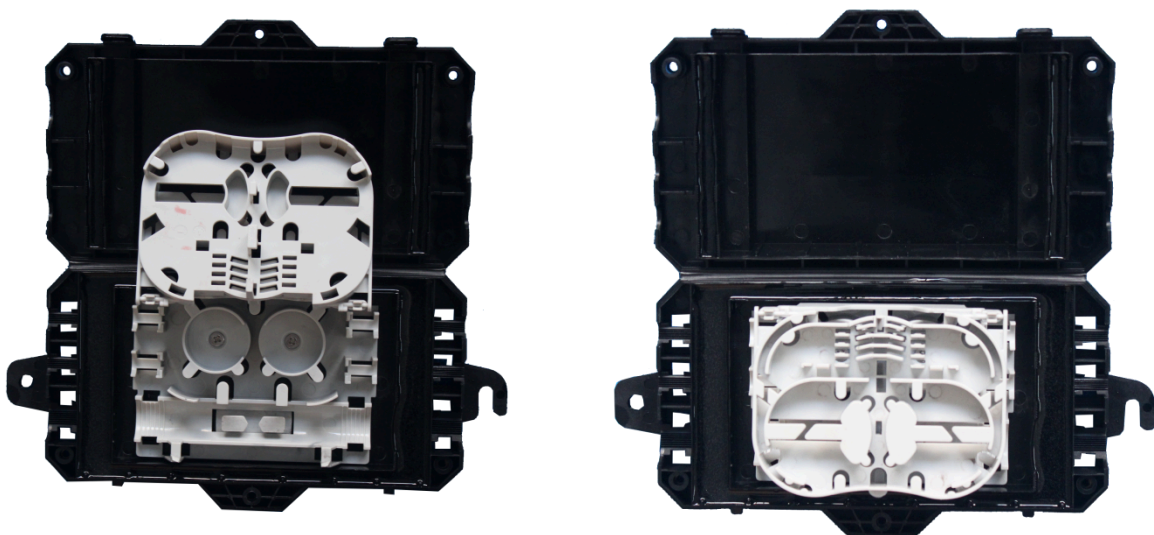





HTSC-FD33 product picture

5. Configuration


5.1 Optical splice trays

No	Model	Pic	Capacity	Note
1	T058A		8F(2 layer)	

5.2 Standard Accessories

No.	Name	Reference picture	Quantity	Remark
1	Heat-shrinkable protection sleeve		1 bag	L=40mm
2	Nylon cable tie		12 pcs	L=120mm
3	Sponge article		4pc	
4	Installation manual		1pc	English

5.3 Optional Accessories

No.	Name	Model	Reference picture	Quantity	Remark
1	Wall-mounting kit			1 set	

6. Package

Standard

Double corrugated carton, 50*37*43 CM, 48 in carton, about 17.5 Kg.