

Technical Specification Fiber Optic Splice Closure

HTTC-08

Customer Approval			
	Name	Signature	Date
Approved by			

Contents

1. General	2
1.1 Description	2
1.2 Standards Comply	2
1.3 Applications Environment	2
2. Characteristics	3
3. Specifications	3
4. Product Picture	4
5. Configuration	4
5.1 Optical splice trays	4
5.2 Standard Accessories	4
5.3 Optional Accessories	5
6. Package	6

1. General

1.1 Description

Fiber optic splice closure is mainly applicable to the straight-through and branching of aerial cables, buried cables and duct cables, as well as the protection on cable joints.

Production type	Classification
HTTC-08	Fiber optic splice closure



Appearance of HTTC-08

1.2 Standards Comply

ITU L.13	Performance requirements for passive optical nodes: Sealed closures for outdoor environments
----------	--

1.3 Applications Environment

Item	Value
Operation temperature	-40 °C ~ +65 °C
Installation temperature	-15 °C ~ +40 °C
Storage temperature	-45 °C ~ +75 °C

2. Characteristics

Installation and reentry with a minimum of tools

Easy to be opened or closed

Re-enterable and reusable

All hardware are captivated

Capable for loading 1:2, 1:4 PLC splitter


Tap Input, Tap Through (Output) and Drops connected are included

Closure can be flash tested

RoHS compliance


3. Specifications

Item	Specifications	Note
Material of housing	High-strength PP+GF	
Material of internal components	High-strength ABS	
Material of metal accessory	High-quality stainless steel	
External dimension(mm)	210mm x160mm x 105mm	
Color	Black	
Number of ports	4	
Cable ports/Max.diameter of cable(mm)	4 main cable ports: 2 ports for cable max diameter 16mm. 2 ports for cable max diameter 13mm. 4 drop cable ports.	
Sealing type	Mechanical	
IP grade	IP67	
Splicing capacity(Max)	24	Optional as request

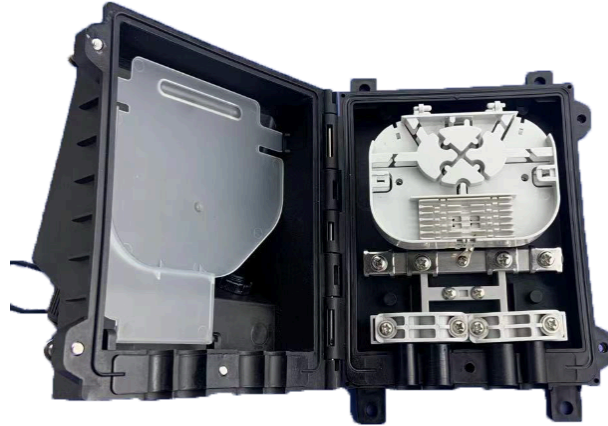






4.Product Picture


HTTC-08 product picture

5. Configuration**5.1 Optical splice trays**





No	Model	Pic	Capacity	Note
1	T051A		12F(2 layer)	

5.2 Standard Accessories

No.	Name	Reference picture	Quantity	Remark
1	Heat-shrinkable protection sleeve		1 bag	L=45mm (T051A)
2	Nylon cable tie		6 pcs	L=120mm
3	Sealing tape		1 rolls	Black
4	Installation tape		1 roll	black
5	Buffer tube for bunchy fiber		2 pcs	L=50cm
6	Installation manual		1pc	English
7	Wound pipe		1 roll	L=24cm

8	Protective cover		8 pcs	
---	------------------	--	-------	--

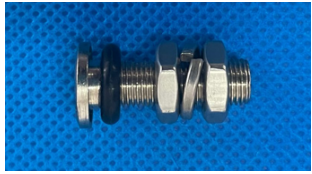5.3 Optional Accessories

No.	Name	Model	Reference picture	Quantity	Remark
1	Earthing deriving device			1pc	
2	Pole-mounting kit	BZ11		1 set	
3	Aerial-mounting kit	JK02		1 set	
4	Wall-mounting kit			1 set	