

Technical Specification
Fiber Optic Splice Closure
HTSC-P326

Customer Approval			
	Name	Signature	Date
Approved by			

Contents

1. General	2
1.1 Description	2
1.2 Standards Comply	2
1.3 Applications Environment	2
2. Characteristics	3
3. Specifications	3
4. Product Picture	4
5. Configuration	4
5.1 Optical splice trays	4
5.2 Optional Rubber Plug for Round Port	5
5.3 Sealing rubber ring specifications of straight-through cable ports	6
5.4 Standard Accessories	7
5.5 Optional Accessories	8
6. Package	9

1. General

1.1 Description

Fiber optic splice closure is mainly applicable to the straight-through and branching of aerial cables, buried cables and duct cables, as well as the protection on cable joints.

Production type	Classification
HTSC-P326	Fiber optic splice closure (dome type)



Appearance of HTSC-P326

1.2 Standards Comply

ITU L.13	Performance requirements for passive optical nodes: Sealed closures for outdoor environments
----------	--

1.3 Applications Environment

Item	Value
Operation temperature	-40 °C ~ +65 °C
Installation temperature	-15 °C ~ +40 °C
Storage temperature	-45 °C ~ +75 °C


2. Characteristics

1. Dome mechanical sealing with advanced internal structure design.
2. Efficiently structure installation design save time when assembling.
3. Tool free to re-enter, easy for maintaining.
4. Slide-in-lock design splice tray, to make opening angle about 90°
5. With oval input port, pass through route with branch is compatible.
6. Innovative elastic seal fitting.
7. IP68 protection can be offered.
8. Suitable for bunchy and ribbon fibers.
9. Aerial, underground, wall-mounting, hand hole-mounting pole-mounting and duct-mounting are appropriate.

3. Specifications

Item	Specifications	Note
Material of housing	High-strength PP+GF	
Material of internal components	High-strength ABS	
Material of metal accessory	High-quality stainless steel	
External dimension(mm)	Φ230*450	
Color	Black	
Number of ports	1 oval port, 4 round ports	
Fiber cable diameter of oval port (mm)	Φ6~Φ17.5mm	
Fiber cable dimension of round port (mm)	Φ6~Φ17.5mm	
Sealing type	Mechanical	
IP grade	IP68	
Splicing capacity(Max) (T010A)	6x24=144F(Single fiber)	Optional as request
Splicing capacity(Max) (T011A)	7x24=168F(Single fiber)	
Splicing capacity(Max) (T117A)	6x48=288F(Single fiber)	
Splicing capacity(Max) (T011E)	7x144=1008F(12F Ribbon)	


4. Product Picture




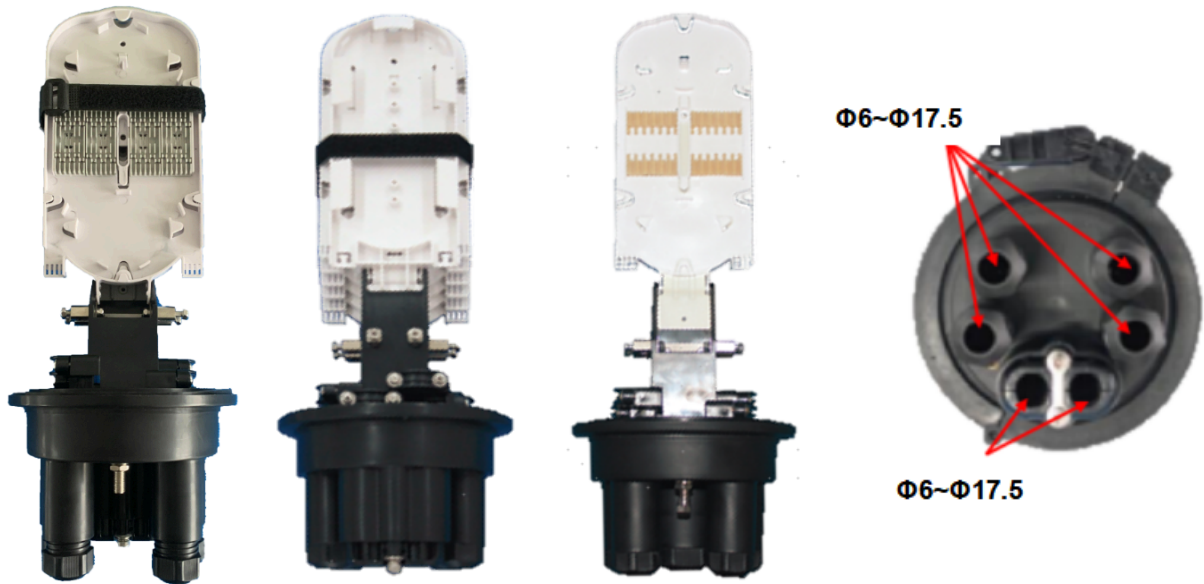


HTSC-P326 product picture


5. Configuration

5.1 Optical splice trays

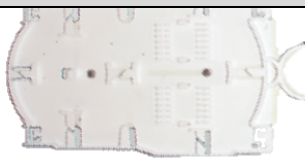No	Model	Pic	Capacity	Note
1	T010A		24F(Single fiber,2 layer)	

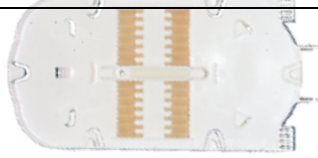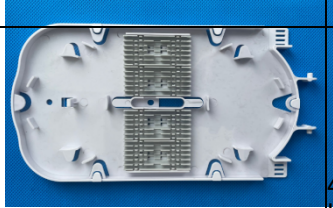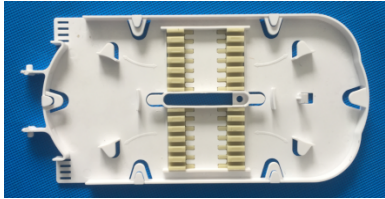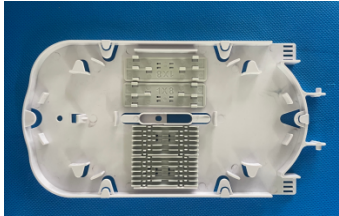



2	T011A		24F(Single fiber,1 layer)	
3	T117A		48F(Single fiber,2 layer)	
4	T011E		144F (12F Ribbon)	
5	T117B		24F(Single fiber,2 layer)+ 4PLC splitters	

5.2 Optional Rubber Plug for Round Port



No	Moudel	Pic	Specification	Note
1	DT04-A		9holes, 2*5mm	




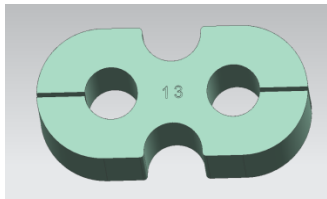





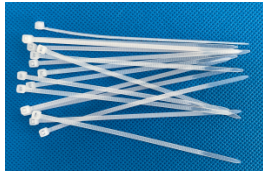


2	DT04-B		9holes, $\Phi 3\text{mm}$	
3	DT04-C		4holes, $\Phi 5.3\text{mm}$	
4	DT04-D		9holes, $2*5\text{mm}$	
5	DT04-H		Big hole, $\Phi 17.5\text{mm}$ ($\phi 14\sim\phi 17.5$) Small hole, $\Phi 10\text{mm}$ ($\phi 7\sim\phi 11$)	
6	DT04-I		Big hole, $\Phi 17.5\text{mm}$ ($\phi 14\sim\phi 17.5$) Small hole, $\Phi 13\text{mm}$ ($\phi 10\sim\phi 14$)	Default, 4 PCS
7	DT04-J		12holes, $2*3\text{mm}$	
8	DT04-F		6 holes, $\Phi 5\text{mm}$	

5.3 Sealing rubber ring specifications of straight-through cable ports






No	Moudel	Pic	Specification	Note
1	DT03-A		$\phi 14 \sim \phi 17.5 \text{mm}$	Default, 1 PCS
2	DT03-B		$\phi 8 \sim \phi 11 \text{mm}$	
3	DT03-C		$\phi 11 \sim \phi 14 \text{mm}$	
4	DT03-D		$\Phi 6 \sim \phi 8 \text{mm}$	

5.4 Standard Accessories

No.	Name	Reference picture	Quantity	Note
1	Heat-shrinkable protection sleeve	 	1 bag	L=60mm (T010A) L=60mm (T011A) L=45mm (T117A) L=40mm (T011E)

2	Nylon cable tie		16 pcs	L=120mm
3	Special wrench		1set	
4	Sealing tape		1 rolls	Black
5	Installation tape		1 roll	black
6	Buffer tube for bunchy fiber		n pcs	Each piece: OD=4.5mm, L=50cm QTY: n=trays number
7	Special wrench		1set	
8	gasket		4pcs	
9	Fiber optic cable plug		4pcs	
10	Fiber optic cable plug		2pcs	
11	Sealing kit for branch cable		4sets	
12	Installation manual		1pc	English
13	Desiccant		1 bag	5g/bag

5.5 Optional Accessories

No.	Name	Model	Reference picture	Quantity	Note
1	Pressure testing valve			1pc	
2	Earthing deriving device			1pc	
3	Pole-mounting kit	BZ24		1 set	
4	Aerial-mounting kit	JK04		1 set	
5	Wall-mounting kit	GB18		1 set	

6. Package

Standard

Double corrugated carton, 730*480*460 mm, 6 in carton, about 24Kg